

Connection of Sony Wireless transmitter to other manufacturers lavalier microphones.

3 wire type microphone


Hirose SMC9-4P for WL-800 Series

Pin assignment




- 1 +5 V output
- 2 Hot
- 3 Cold
- 4 GND

MP Mini-Jack for Freedom

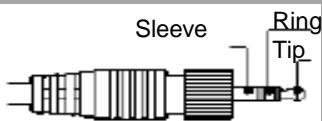


- Ring +5 V output
- Tip Hot
- Sleeve GND

SMC9-4P	MP
1	Ring
2	Sleeve
3	Tip
4	Sleeve

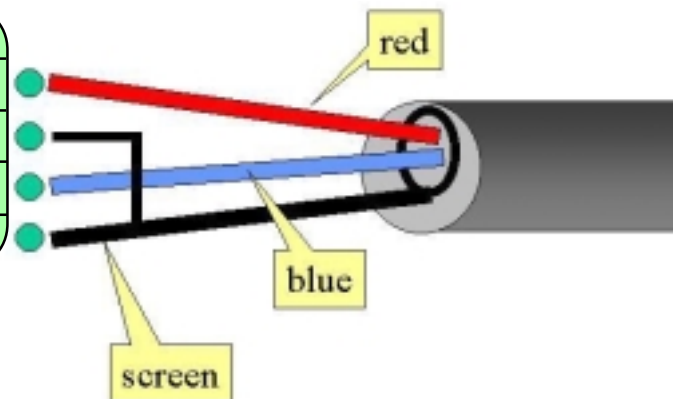

2 wire type microphone

SMC9-4P	MP
1	Ring
2	Sleeve
3	Tip
4	Sleeve

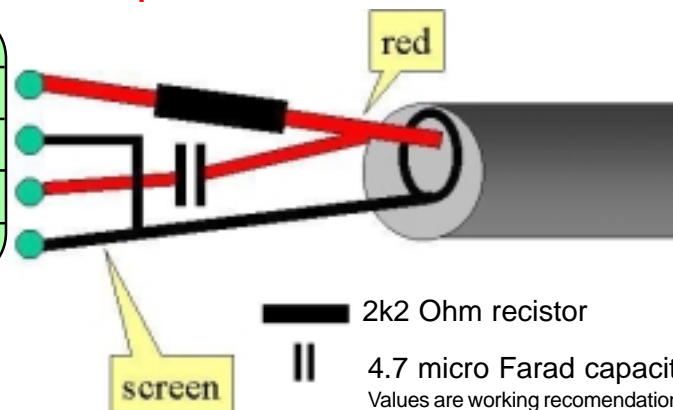

— 2k2 Ohm resistor

|| 4.7 micro Farad capacitor

Values are working recommendations, but not formally Sony approved.

Cable colours consistent with Sennheiser MKE-2.

Other manufacturers, like DPA, will provide you with an adapter for their lavaliers.